

Description

Programming unit for Flow and Temperature Transmitter FC01-FT.

Features

- Programming by CC software (Customer Calibration)
- Display of:
 - configuration data
 - parameter data
 - measured values for flow and temperature
 - setpoint status
 - retrieval of peak memory
 - diagnosis and error indication




FC01-PD

1


Technical data

| Programming Unit FC01-PD | |
|-------------------------------------|--|
| General data | |
| Input voltage | via FC01-FT |
| Degree of protection | IP65 |
| Materials | acrylic vinyl/ styrene/polycarbonate acrylic ester polymere/polycarbonate |
| Mass | 250 g |
| Dimensions (L x W x H) | 138 x 190 x 53 mm |
| Cable between FC01-PD and FC01 - FT | 1 m ribbon cable with plug-in connector |

Connection diagram FC01-PD

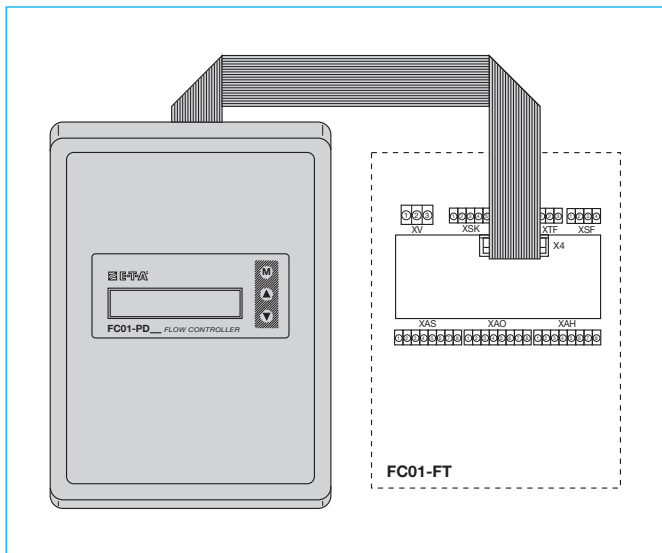

Dimensions FC01-PD

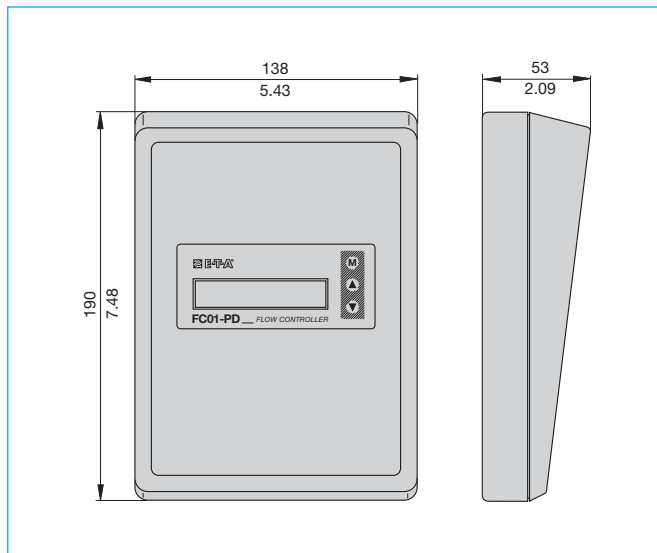

Ordering information

| | |
|----------------|------------------------------|
| Type No. | |
| FC01-PD | Programming unit for FC01-FT |
| FC01-PD | |

This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.